


<b>AERODROME CHART - ICAO</b>	ARP : 57 05 34.04N 009 50 56.99E	AD ELEV : 8 FT	ELEV in FT Dimensions / Distances in M	Aalborg APP : 123.980 362.450 Aalborg TWR : 118.305 353.525 ATIS : 120.480 257.800	<b>AD 2 - EKYT ADC Aalborg (CIV / MIL)</b>
-------------------------------	-------------------------------------	----------------	-------------------------------------------	------------------------------------------------------------------------------------------	----------------------------------------------------

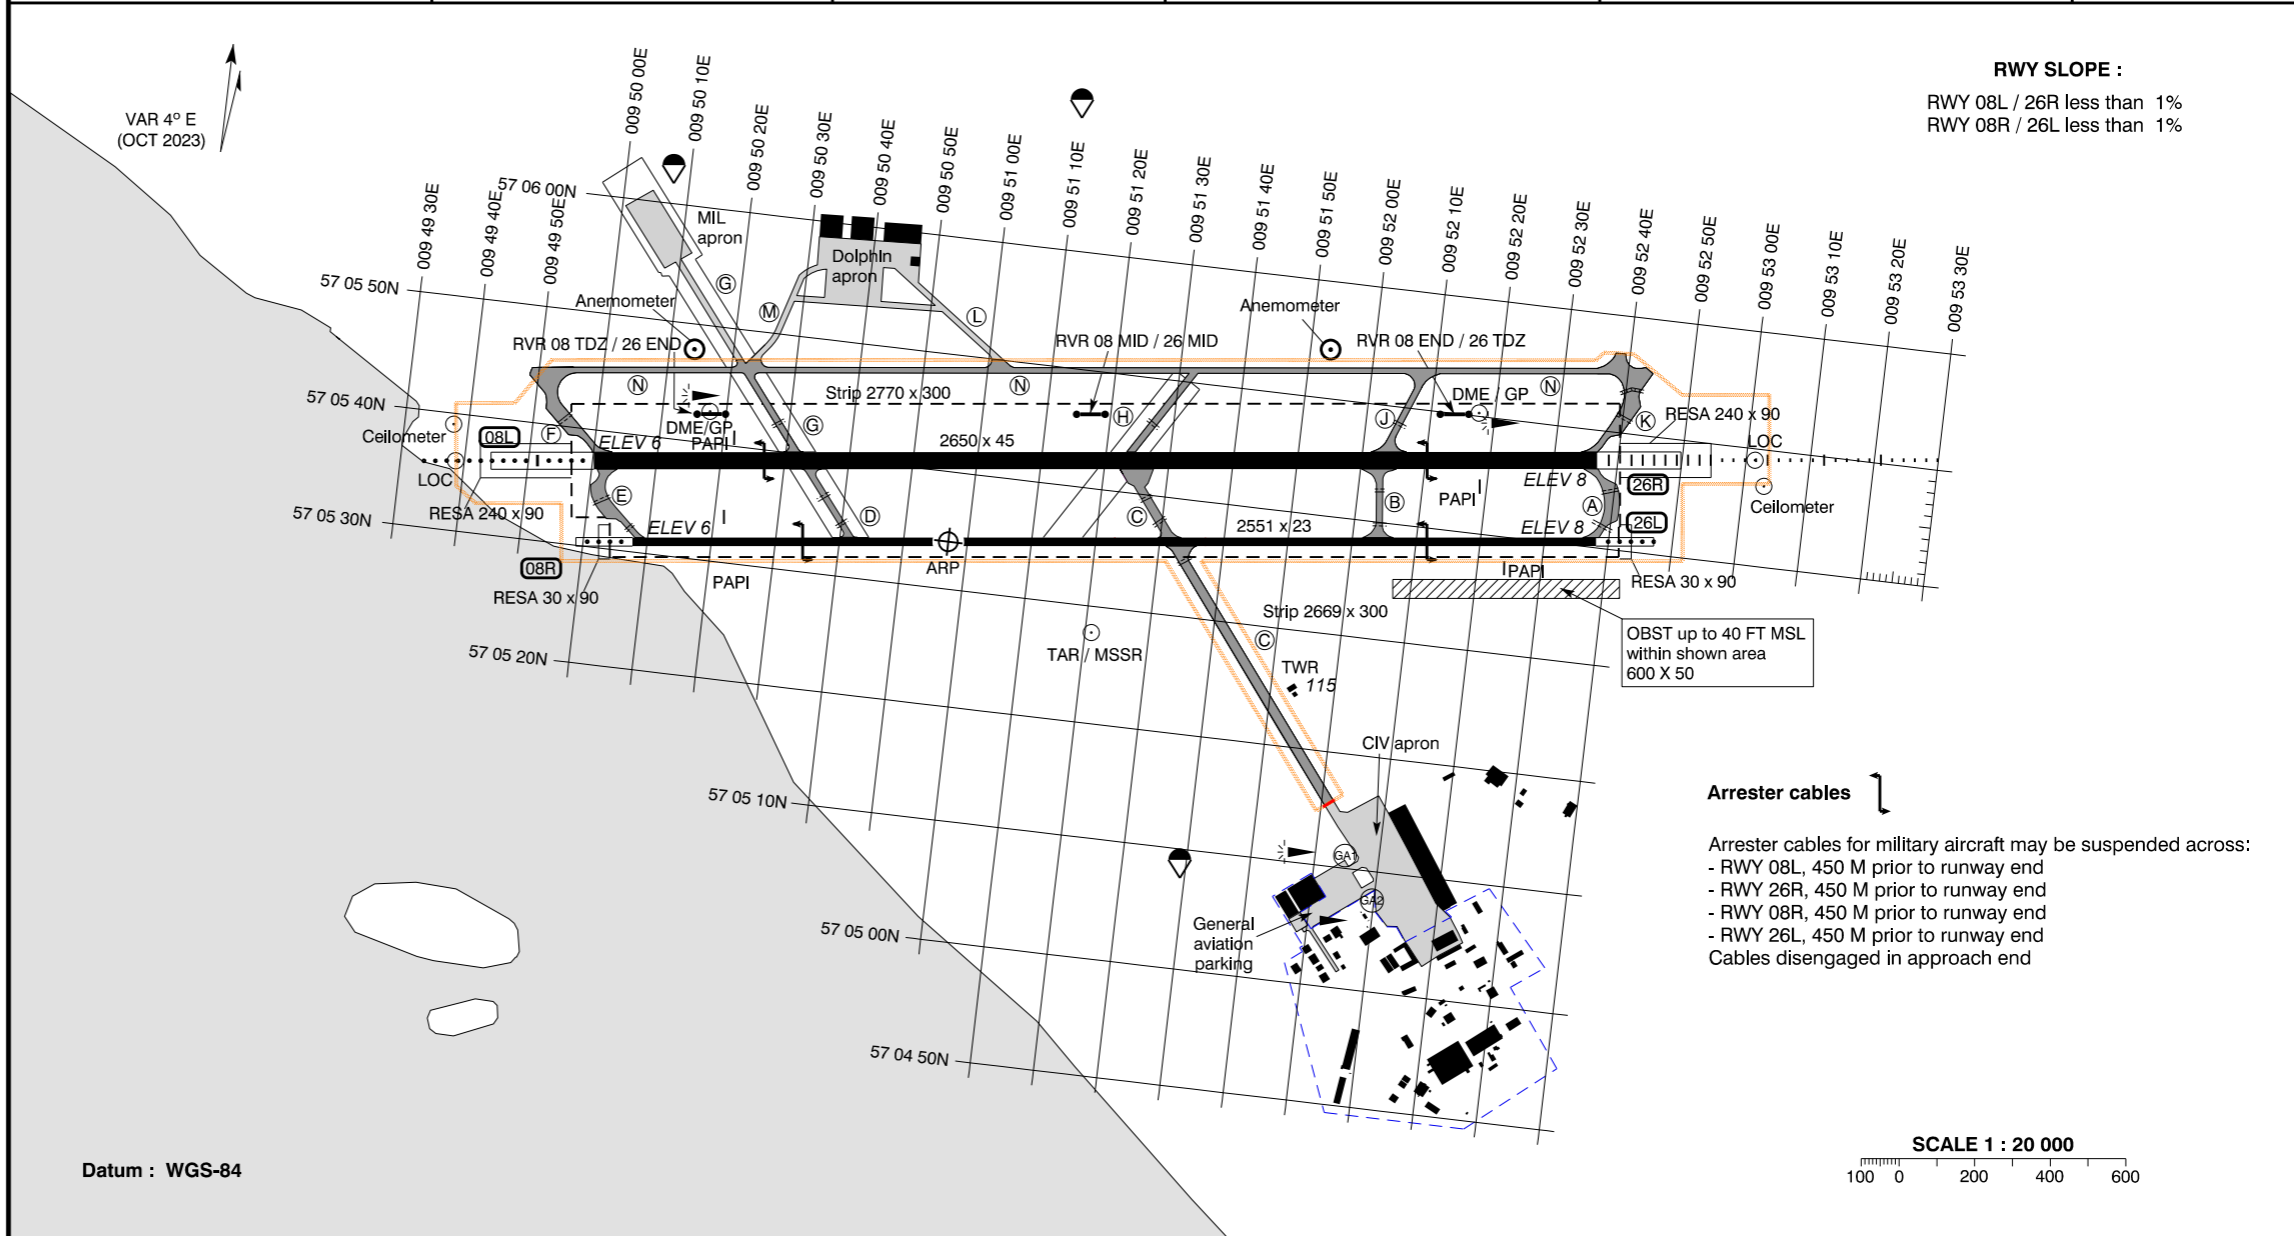

Changes : PAPI right side wingbars RWY 08R, 26L and 26R withdrawn. PAPI angle RWY 08R/26L changed to 3.00°.

NR	Direction	THR PSN	Pavement Strength	Day marking	Declared distances				APCH and RWY LGT (Unless otherwise stated lighting is LIH adjustable)							
					PSN TWY	TORA	TODA	ASDA	LDA	APCH	THR	TDZ	PAPI	Centre line	Edge	End
08L	083.3° GEO 079.3° MAG	57 05 37.37N 009 50 00.30E	Concrete / Asphalt PCN 66 F / D / W / T Composite construction	THR RWY NR TDZ Centre line Side stripes	E/F	2650	2650	2650	2650	470 M White	Green	Hatched	3.00°	2650 M 15 M White: 0-1750 M White/red: 1750-2350 M Red: from 2350 M	2650 M White	Red
					G	2151	2151	2151								
					D	2090	2090	2090								
					C	1243	1243	1243								
					H	1240	1240	1240								
26R	263.3° GEO 259.3° MAG	57 05 47.43N 009 52 36.63E	Asphalt PCN 52 F / D / X / U	THR RWY NR Centre line Side stripes	A/K	2650	2650	2650	2650	900 M CAT II/III	Green	900 M White	3.00°	2650 M White	Red	
					J	2116	2116	2116								
					B	2082	2082	2082								
					H	1449	1449	1449								
08R	083.3° GEO 079.3° MAG	57 05 30.87N 009 50 07.68E	Asphalt PCN 52 F / D / X / U	THR RWY NR Centre line Side stripes	E	2551	2551	2551	2551	150 M White LIL, Cross-bar 150 M from THR	Green LIL	Hatched	3.00°	2550 M Yellow LIL	Red LIL	
					A	2551	2551	2551								
26L	263.3° GEO 259.3° MAG	57 05 40.52N 009 52 38.07E	Asphalt PCN 52 F / D / X / U	THR RWY NR Centre line Side stripes	A	2551	2551	2551	2551	150 M White LIL, Cross-bar 150 M from THR	Green LIL	Hatched	3.00°	2550 M Yellow LIL	Red LIL	

**OTHER :** Secondary power supply : Yes, switch-over time CAT II/III MAX 1 SEC, switch-over time during departures with RVR less than 800M MAX 1 SEC, otherwise MAX 15 SEC.

**OBSTACLES :** All obstacles are marked by day and night