

Changes : Sønderborg Information FREQ changed to 126.405.

NAVAIAR


ARP : 54 57 51.72N 009 47 30.23E
On RWY, 673 M from THR 14

AD ELEV : 24 FT

ELEV in FT
Dimensions /Distances in M

Sønderborg Information : 126.405

AERODROME CHART - ICAO

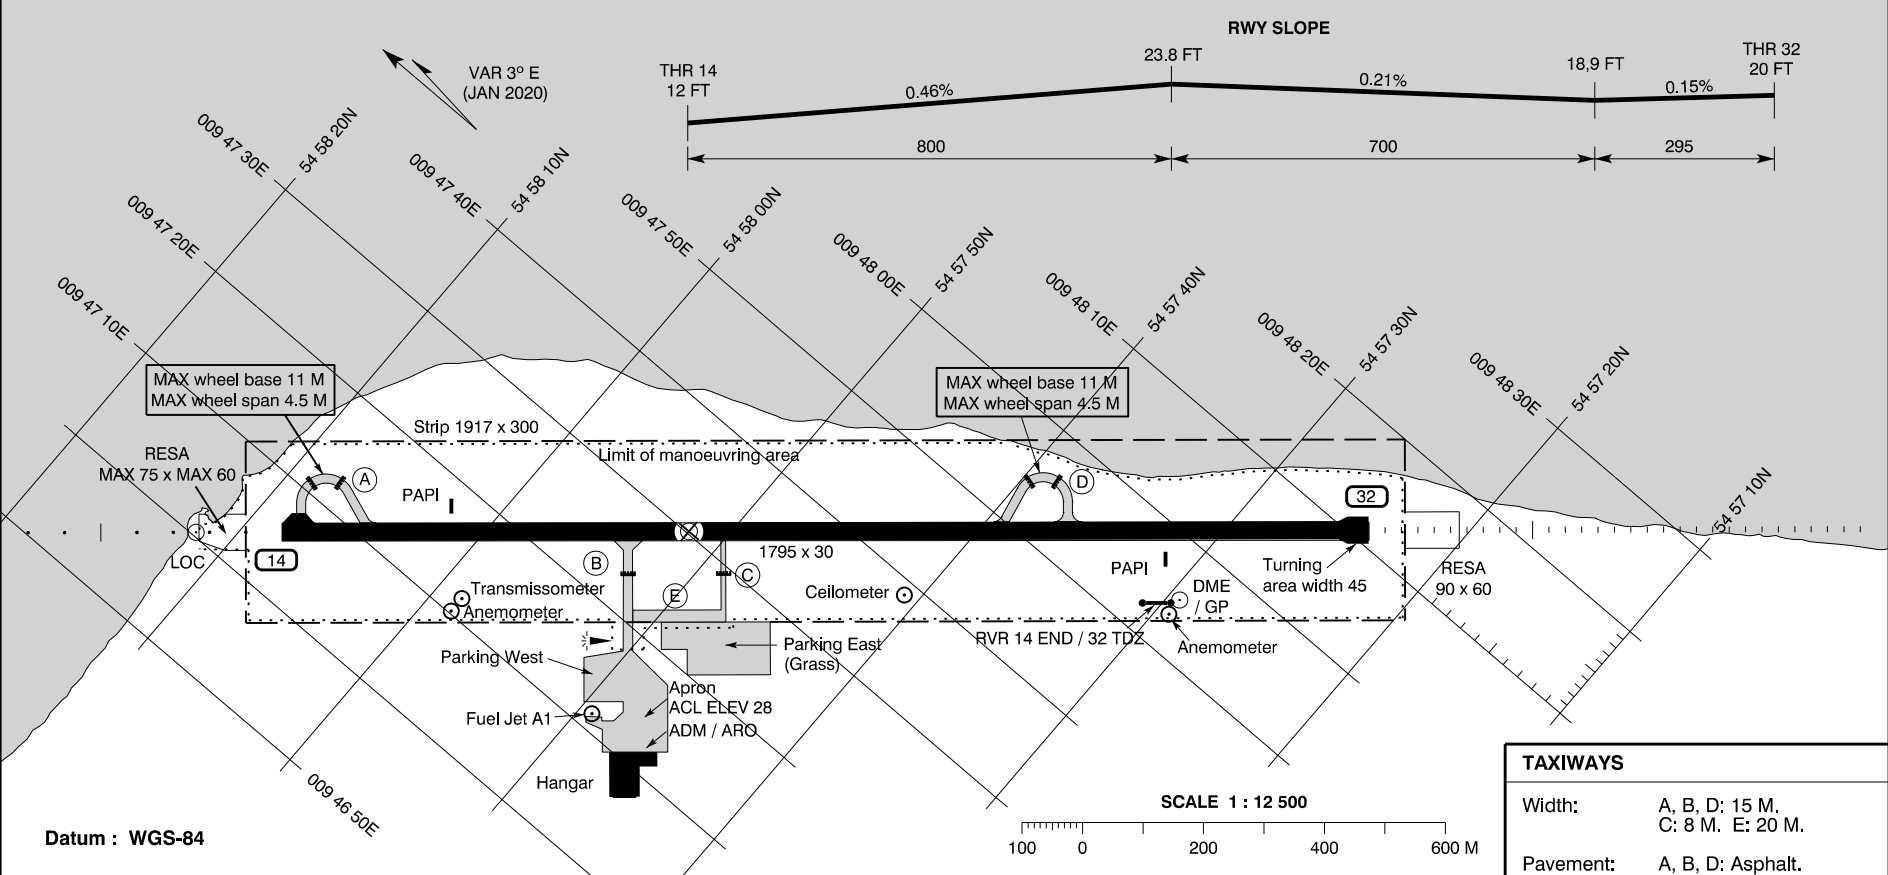

Datum : WGS-84

SCALE 1 : 12 500



RUNWAYS

NR	Direction	THR PSN	Pavement Strength	Day marking	Declared distances					APCH and RWY LGT (Unless otherwise stated lighting is LIH adjustable)				
					PSN TWY	TORA	TODA	ASDA	LDA	APCH	THR	PAPI	Edge	End
14	139.4° GEO 136.4° MAG	54 58 08.23N 009 47 05.60E	Asphalt PCN 40 F / A / W / T	THR RWY NR TDZ RWY 32 Centre line		1795	1795	1795	1795	420 M White	Green	3°	1795 M White 60 M	Red
32	319.4° GEO 316.4° MAG	54 57 24.14N 009 48 11.37E				1795	1795	1795	1795	900 M White	Green	3°	1795 M White 60M	Red

TAXIWAYS

Width: A, B, D: 15 M.
C: 8 M. E: 20 M.

Pavement: A, B, D: Asphalt.
C, E: Grass.

Strength: A, B, D:
PCN 40 / F / A / W / T.

Day marking: A, B, D: Centre line
Holding position.
C, E: Edge.

Lighting: A, D: Blue edge LIL.
B: Blue edge LIL. RGL.

TWY C, E: For use by day only.

APRON

Pavement: Asphalt
Strength: PCN 40 / F / A / W / T

OTHER : Secondary power supply : Yes, switch-over time MAX 15 SEC

OBSTACLES : All obstacles are marked by day and night

AIRAC AMDT 02/26 - 19 FEB 26

AD 2 - EKSBC
ADC
Sønderborg